marathon®

Fire Pump Motors

Model No: 326TTDCD4035
Catalog No: U1110

Fire Pump Motor, 50 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 326T Frame, DP

©2026 Marathon, All Rights Reserved.

marathon®

Product Information Packet: Model No: 326TTDCD4035, Catalog No: U1110 Fire Pump Motor, 50 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 326T Frame, DP

Nameplate Specifications

Phase	**3**	Output HP	**50 Hp**
Output KW	**37.0 kW**	Voltage	**575 V**
Speed	**1775 r/min**	Synchronous RPM	**1800 r/min**
Service Factor	**1.15**	Frame	**326T**
Enclosure	**Drip Proof**	Thermal Protection	**No Protection**
Efficiency	**93.6 %**	Ambient Temperature	**50 °C**
Frequency	**60 Hz**	Current	**48.0 A**
Power Factor	**83**	Duty	**Continuous**
Insulation Class	**F**	Design Code	**B**
KVA Code	**F**	Drive End Bearing Size	**6312**
Opp Drive End Bearing Size	**6311**	UL	**Listed**
CSA	**Y**	CE	**Y**
IP Code	**23**	Number of Speeds	**1**

Technical Specifications


Electrical Type	**Squirrel Cage Induction Run**	Starting Method	**Part Wdg Start & Wye Start Delta Run**
Poles	**4**	Rotation	**Reversible**
Resistance Main	**.205 O**	Mounting	**Rigid Base**
Motor Orientation	**Horizontal**	Drive End Bearing	**Ball**
Opp Drive End Bearing	**Ball**	Frame Material	**Cast Iron**
Shaft Type	**T**	Overall Length	**29.73 in**
Frame Length	**15.74 in**	Shaft Diameter	**2 1/8 in**
Shaft Extension	**5.25 in**	Assembly/Box Mounting	**F1/F2 Capable**

Drawings

Connection Drawing	**EE7300BH**	Outline Drawing	**SS620746-326T**

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 16/10/2026

Uncontrolled Copy

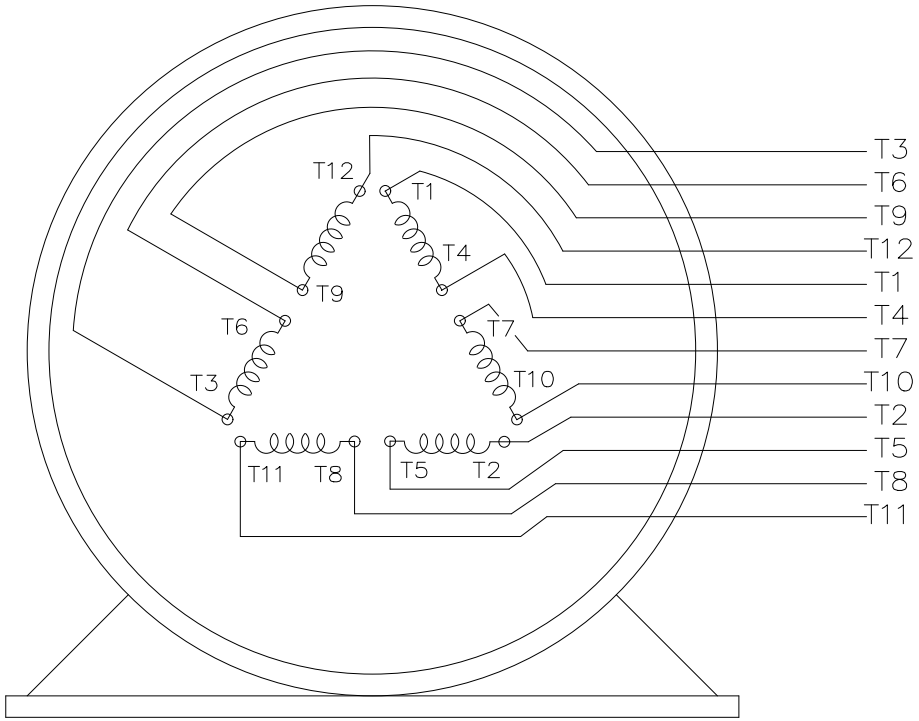

VIEW OF TERMINAL END

T12(W4)
T1(U1)
T6(W2)
T7(U3)
LINE 1

T2(V1)
T4(U2)
T8(V3)
T10(U4)
LINE 2

T3(W1)
T5(V2)
T9(W3)
T11(V4)
LINE 3

DRAWING REVISION: E	REVISION BY: SB	REV DATE/ © DATE: 08/04/2025
REQUEST NUMBER: CR-0023654	APPROVED BY: SBD	DATE: 08/04/2025
REQUEST NUMBER DESCRIPTION: DRAWING TITLE BLOCK UPDATED		

COPYRIGHT (PER REVISION DATE) MARATHON ELECTRIC, LLC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF MARATHON ELECTRIC, LLC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

PRIMARY DIMENSIONS ARE INCH
mm DIMENSIONS IN [BRACKETS]
ARE FOR REFERENCE ONLY

DRAWN BY: RJW	marathon™	
DATE: 02/11/2005		
APPROVED BY: GK	DESCRIPTION: CONNECTION DIAGRAM 12 LEAD - SINGLE VOLTAGE	
DATE: 02/11/2005		
REFERENCE	MATERIAL	PROCESS/FINISH
THIRD ANGLE PROJECTION	SIZE: A / DRAWING NUMBER: EE7300BH	SHEET: 1 OF 1

Uncontrolled Copy

Data Sheet

Date: 12/12/2018
Customer:
Attention:
Submitted by: FAREEDA DUDEKULA

marathon® electric

326TTDCD4035

Submittal


Data @ 575 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	15.6	19.2	26.8	36.0	48.0	55.2	60.0	264	
Torque (ft-lb)	0.00	36.5	73.5	111	148	171	186	250	
RPM	1800	1795	1788	1780	1775	1,768	1765	0	
Efficiency (%)		90.2	93.0	93.6	93.6	93.6	93.0		
P.F. (%)	5.0	55.0	75.0	81.0	83.0	84.0	85.0	39.0	

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle
Speed (RPM)	0	900	1675	1775	1800
Current (Amps)	264	240	148	48.0	15.6
Torque (ft-lb)	250	240	325	148	0.00

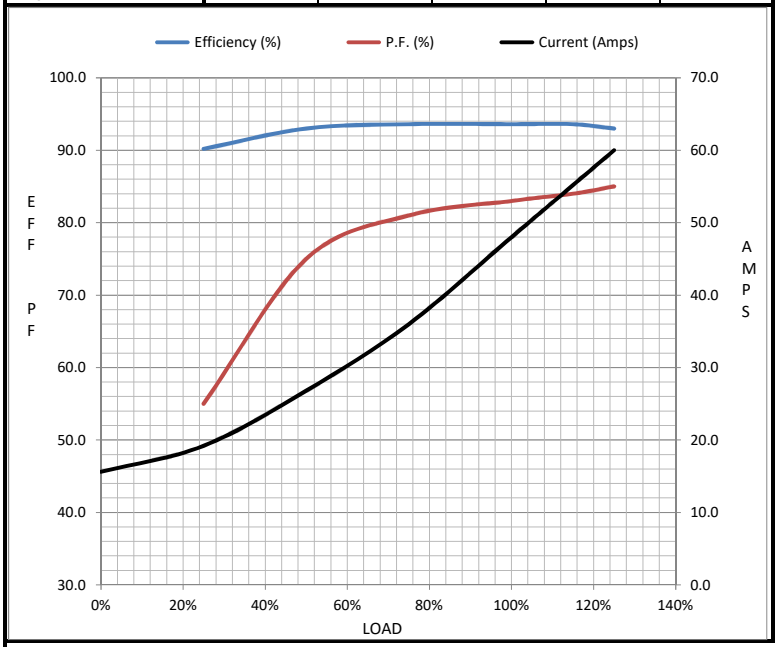

Information Block

HP	50.0	
Sync. RPM	1800	
Frame	326	
Enclosure	DP	
Construction	TDC	
Voltage	575	V
Frequency	60	Hz
Design	B	
LR Code letter	G	
Service Factor	1.15	
Temp Rise @ FL	45	° C
Duty	CONT	
Ambient	40	° C
Elevation	1,000	feet
Rotor/Shaft wk²	0.00	Lb-Ft²
Ref Wdg	IE2L2004101 NONE	
Sound Pressure @ 1M	75	dBA
VFD Rating	NONE	
Outline Dwg	SS620746	
Conn. Diag	EE7300BH	
Additional Specifications:		
0		
0		

EQUIV CKT (OHMS / PHASE)

R1	R2	X1	X2	Xm
0.1950	0.1060	0.8150	1.0100	22.2370

Speed -Torque Curve

